

Meleon A



镀锌钢


RoHS

防护等级

IP 40


环境温度


-100 °C – 300 °C (-148°F – 572°F)

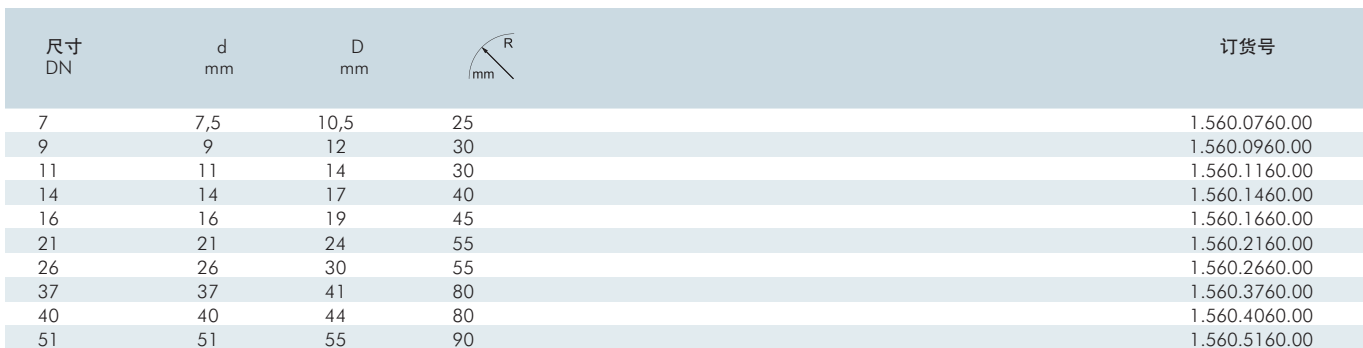

RoHS

环境温度 -15 °C – 70 °C (5°F – 158°F)



| 尺寸 DN | d mm | D mm |  | 订货号 |
|----------|---------|---------|---|---------------|
| 7 | 7,5 | 11,5 | 25 | 1.561.0761.00 |
| 9 | 9 | 13 | 30 | 1.561.0961.00 |
| 11 | 11 | 15 | 30 | 1.561.1161.00 |
| 14 | 14 | 18 | 40 | 1.561.1461.00 |
| 16 | 16 | 20 | 45 | 1.561.1661.00 |
| 21 | 21 | 25 | 55 | 1.561.2161.00 |
| 26 | 26 | 31 | 55 | 1.561.2661.00 |
| 37 | 37 | 42 | 80 | 1.561.3761.00 |
| 40 | 40 | 45 | 80 | 1.561.4061.00 |
| 51 | 51 | 56 | 90 | 1.561.5161.00 |

金属配件

MeleonFit





材质 黄铜镀镍

防护等级 IP 54

环境温度 -20 °C – 80 °C (-4 °F – 176 °F)

RoHS



| 尺寸 | d mm | GL mm | H mm |  mm | 适配 | 订货号 |
|---------|---------|----------|---------|---|----|---------------|
| M 12 | 6 | 8 | 24 | 15 | 7 | 1.570.1260.50 |
| M 16 | 7 | 8 | 24 | 20 | 9 | 1.570.1660.51 |
| M 16 | 9 | 10 | 26 | 20 | 11 | 1.570.1660.50 |
| M 20 | 12 | 10 | 26 | 22 | 14 | 1.570.2060.51 |
| M 20 | 14 | 10 | 26 | 22 | 16 | 1.570.2060.50 |
| M 25 | 18 | 10 | 27 | 28 | 21 | 1.570.2560.50 |
| M 32 | 23 | 12 | 31 | 35 | 26 | 1.570.3260.50 |
| M 40 | 33,5 | 14 | 36 | 45 | 37 | 1.570.4060.50 |
| M 50 | 37 | 14 | 36 | 55 | 40 | 1.570.5060.50 |
| M 63 | 46 | 14 | 36 | 65 | 51 | 1.570.6360.50 |
| PG 7 | 6 | 8 | 24 | 15 | 7 | 1.570.0760.14 |
| PG 9 | 7 | 8 | 24 | 17 | 9 | 1.570.0960.14 |
| PG 11 | 9 | 10 | 26 | 20 | 11 | 1.570.1160.14 |
| PG 13,5 | 12 | 10 | 26 | 22 | 14 | 1.570.1360.14 |
| PG 16 | 14 | 10 | 26 | 24 | 16 | 1.570.1660.14 |
| PG 21 | 18 | 10 | 27 | 30 | 21 | 1.570.2160.14 |
| PG 29 | 23 | 12 | 31 | 40 | 26 | 1.570.2960.14 |
| PG 36 | 33,5 | 14 | 36 | 50 | 37 | 1.570.3660.14 |
| PG 42 | 37 | 14 | 36 | 60 | 40 | 1.570.4260.14 |
| PG 48 | 46 | 14 | 36 | 65 | 51 | 1.570.4860.14 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |


MeleonFit S


RoHS

材质 黄铜镀镍

防护等级 IP 54

环境温度 -20 °C – 80 °C (-4 °F – 176 °F)



| 尺寸 | d mm | GL mm | H mm |  mm | 适配 | 订货号 |
|---------|---------|----------|---------|---|----|---------------|
| M 12 | 6 | 8 | 27 | 15 | 7 | 1.571.1260.50 |
| M 16 | 7 | 8 | 27 | 20 | 9 | 1.571.1660.51 |
| M 16 | 9 | 10 | 29 | 20 | 11 | 1.571.1660.50 |
| M 20 | 12 | 10 | 29 | 22 | 14 | 1.571.2060.51 |
| M 20 | 14 | 10 | 29 | 22 | 16 | 1.571.2060.50 |
| M 25 | 18 | 10 | 31 | 28 | 21 | 1.571.2560.50 |
| M 32 | 23 | 12 | 35 | 35 | 26 | 1.571.3260.50 |
| M 40 | 33,5 | 14 | 41 | 45 | 37 | 1.571.4060.50 |
| M 50 | 37 | 14 | 41 | 55 | 40 | 1.571.5060.50 |
| M 63 | 46 | 14 | 41 | 65 | 51 | 1.571.6360.50 |
| | | | | | | |
| PG 7 | 6 | 8 | 27 | 15 | 7 | 1.571.0760.14 |
| PG 9 | 7 | 8 | 27 | 17 | 9 | 1.571.0960.14 |
| PG 11 | 9 | 10 | 29 | 20 | 11 | 1.571.1160.14 |
| PG 13,5 | 12 | 10 | 29 | 22 | 14 | 1.571.1360.14 |
| PG 16 | 14 | 10 | 29 | 24 | 16 | 1.571.1660.14 |
| PG 21 | 18 | 10 | 31 | 30 | 21 | 1.571.2160.14 |
| PG 29 | 23 | 12 | 35 | 40 | 26 | 1.571.2960.14 |
| PG 36 | 33,5 | 14 | 41 | 50 | 37 | 1.571.3660.14 |
| PG 42 | 37 | 14 | 41 | 60 | 40 | 1.571.4260.14 |
| PG 48 | 46 | 14 | 41 | 65 | 51 | 1.571.4860.14 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |